

ALP 500


Thermal protection glass cloth, aluminised PET-foil on one side, reverse side white. Thickness 0.4 mm. It be used on continuous temperature until 180°C . Piece on request.

TEST FEATURES	UNIT	VALUE	TEST METHOD
Basis weight	g/m ²	520 (+/- 10%)	ISO 2286 -2A
Thickness	mm	0.4 (+/- 10%)	ISO 2286 -3
Outside face		Aluminised PET-foil	
Inside Face		Glass-fiber cloth	
Warp count (length)	Threads /cm	19	DIN 53-853
Warp strength	daN/ 50 mm	> 350	DIN 53-354
Weft count (width)	Threads /cm	11	DIN 53-853
Weft strength	daN/ 50 mm	> 250	DIN 53-354
Temperature glass cloth long / short duration	°C	-50 ; +550 long -50 ; +850 short	Note reduced tear-strength at upper temperature level
Temperature composite material Long / Short duration	°C	-50 ; +180 long -50 ; +200 short	Note reduced tear-strength at upper temperature level


AVAILABLE TRACKS



V TRACK - HOOK and LOOP
FROM 16 mm



C TRACK




BP TRACK- SNAP BUTTON



CUSTOMISED PIECES
ON REQUEST

CUSTOMIZED

AVAILABLE DIAMETERS (mm)

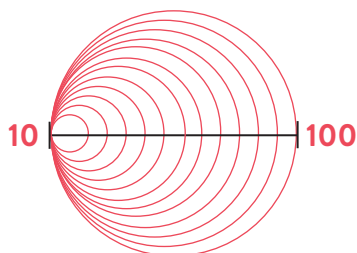

10	16	30	50	80
12	20	35	60	90
14	25	40	70	100



This data-sheet is subject to changes without notice.